




RV2 series

100% Magnetic Front-Access Stage LED Display

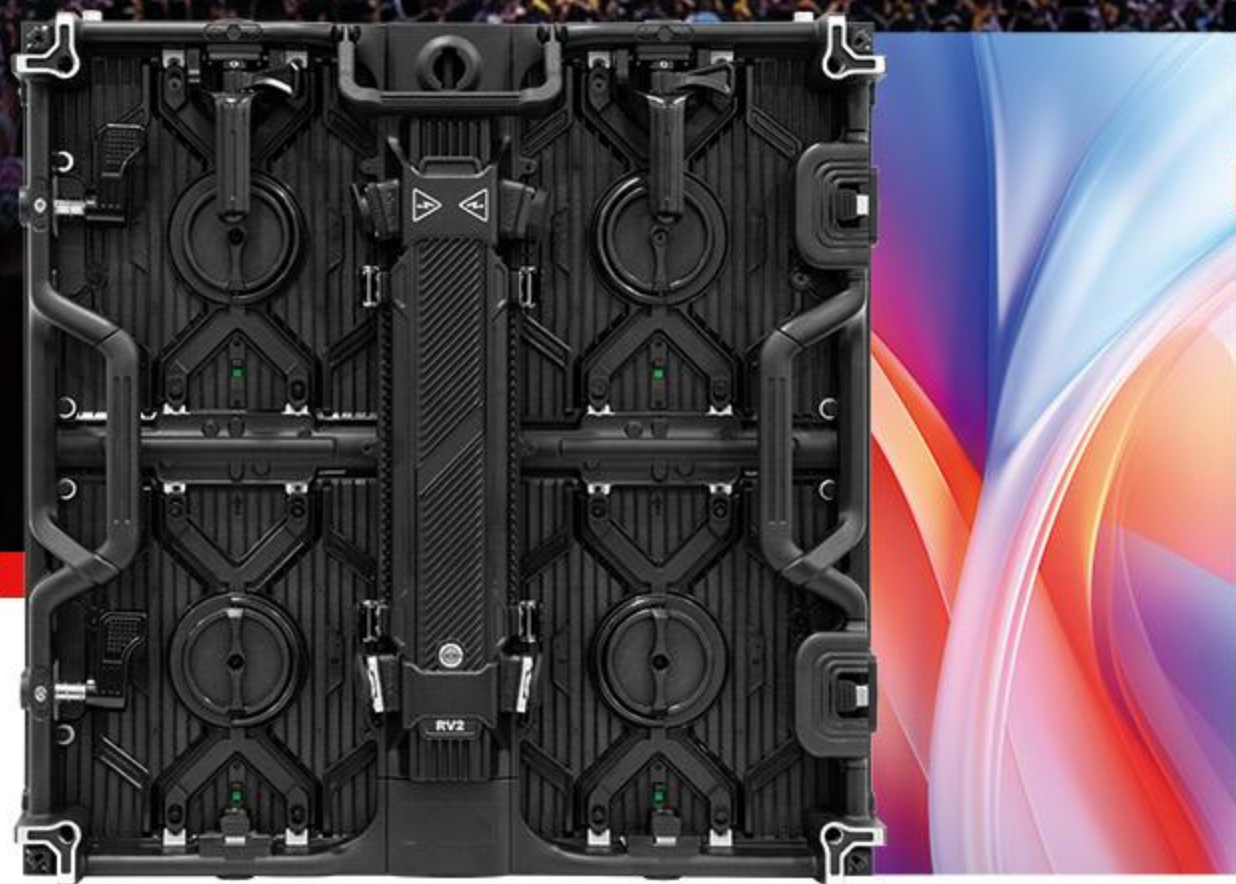

AOB Anti-collision



Front & Rear Maintenance



7680Hz High Refresh



**Arc Lock
(Optional)**


Make LED Display Simple!



<https://www.mpiled.com>



Email: mpiled@mpiled.cn

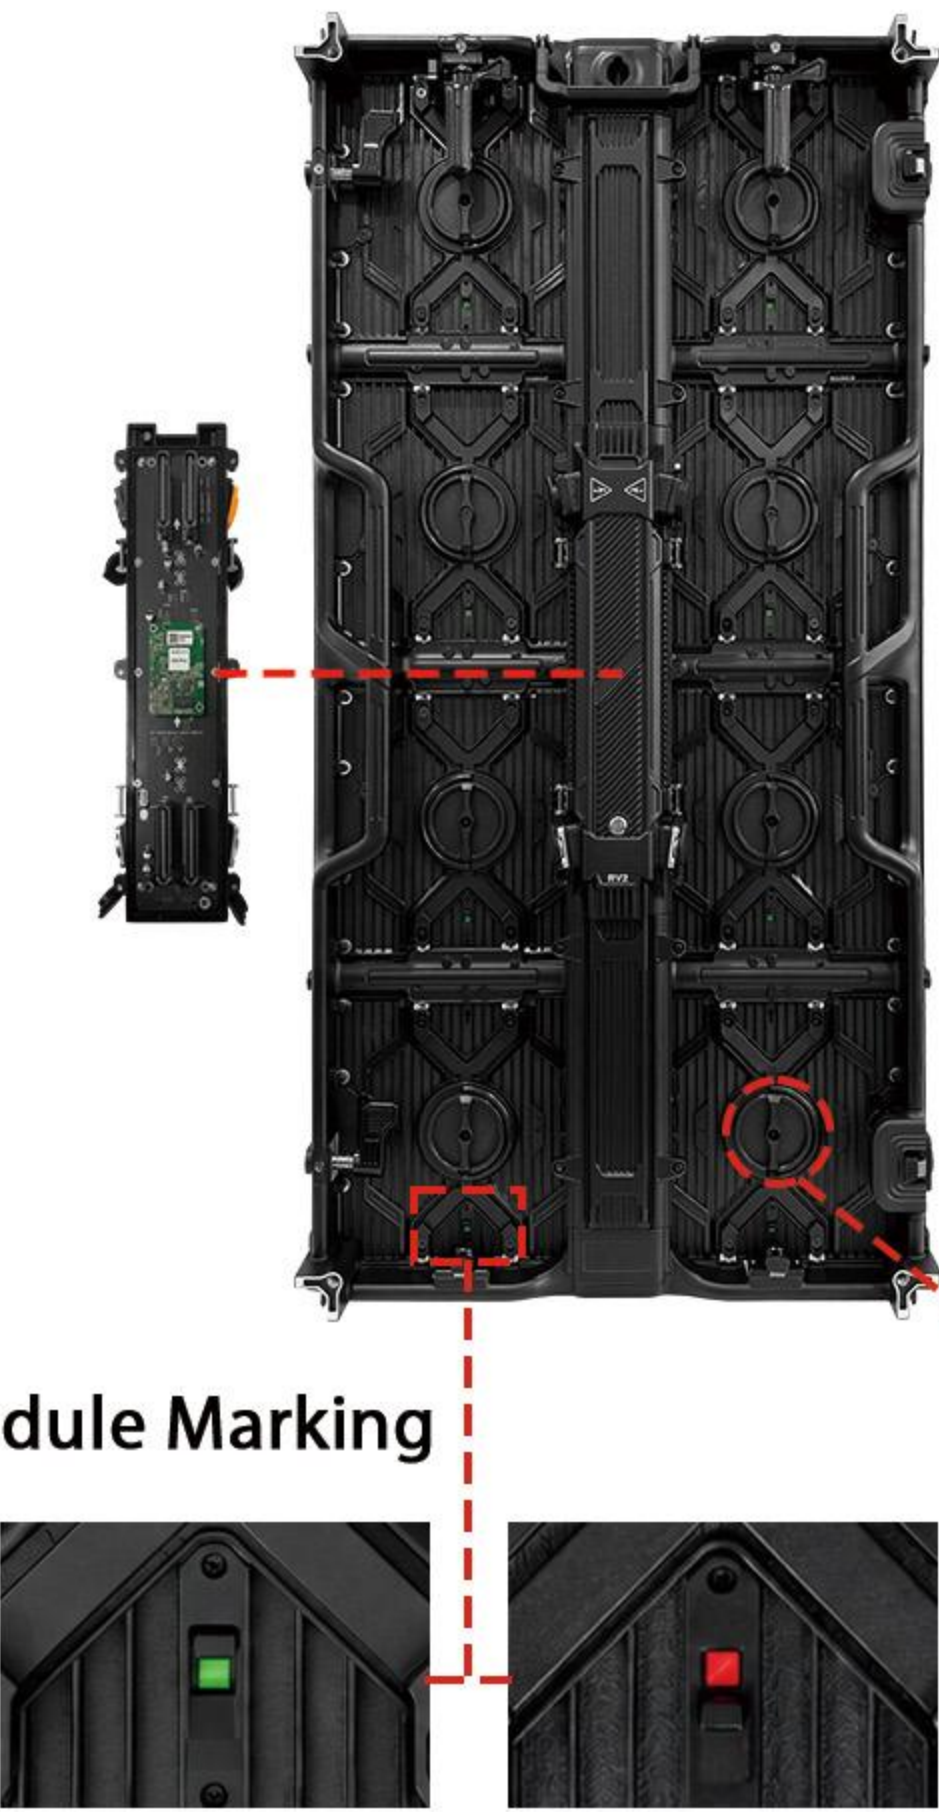


Module Marking

Normal

Fault

Easy Maintenance

Which requires no additional tools

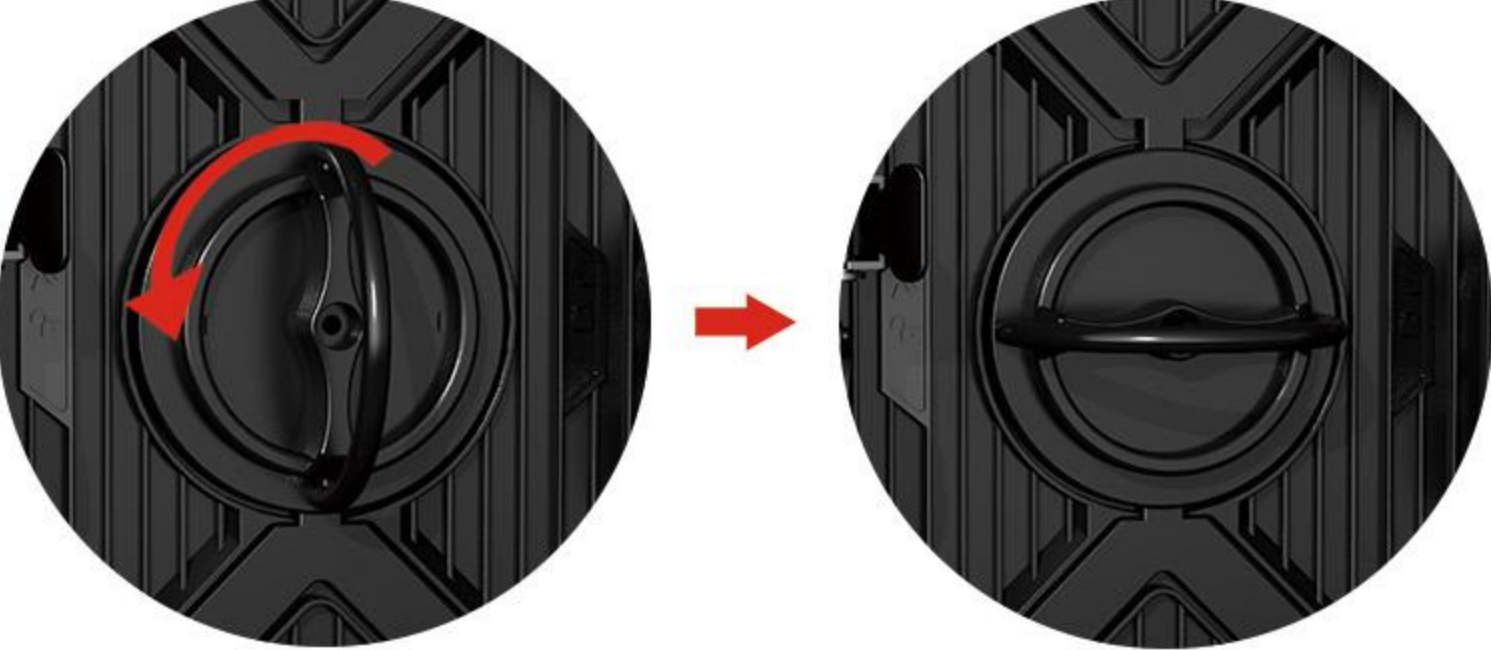

Lock

Unlock

Parameter	Outdoor P2.6	Outdoor P2.9
LED Configuration	SMD1415	SMD1415
Pixel Density(dots/m ²)	147456dots/m ²	112896dots/m ²
IP Rating	IP65	
Brightness(nits)	4000-5000nits adjustable	
Max Power Consumption	640 / 192 (W/m ²)	
Module size(mm)	250*250mm	
Cabinet size(mm)	500x500mm & 500x1000mm	
Cabinet weight(kg)	6.9kg / 12.3kg	
Viewing Angle(H/V)	Horizontal:160°, Vertical:140°	
Grayscale(bit)	14-16bit	
Refresh	3840Hz - 7680Hz	
Input Voltage(V)	110V / 220V (Optional), 50/60Hz	
Work environment	Temperature -20°C~60°C, 10%-90% Humidity	
Lifespan	Lifespan≥100000H, MTBF ≥50000H	



Live Music



Business Activities



Beauty Contest



Stage Activities